

# BRISTAN


## Installation Instructions & User Guide

Please leave these instructions with the end user

Product Code: WMNT10 C (D3)

### Specifications


#### Working Pressures

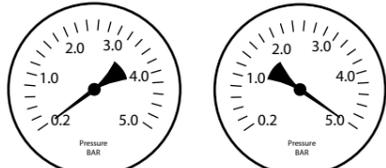

Min: 0.2 bar Max: 5.0 bar

Maximum Static Pressure: 10.0 bar

### Inlet Dimensions

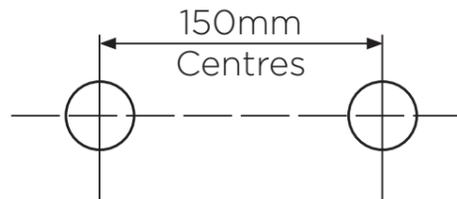

#### IMPORTANT


This product is only suitable for use with 15mm copper pipework.

### Inlet Connections



3/4" BSP Threaded Connections

### Tools You'll Need

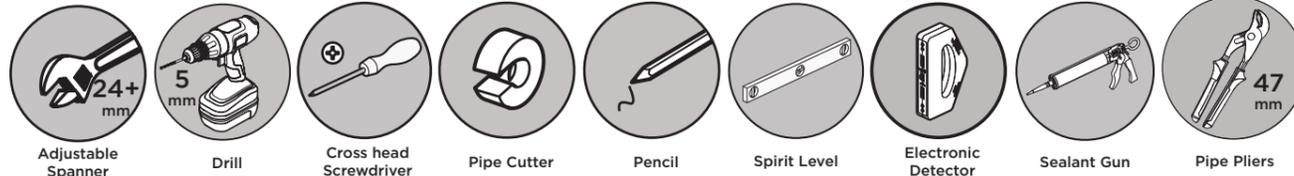

### Prior to Installation

All products manufactured and supplied by Bristan are safe to use provided that they are installed, operated and receive regular maintenance in accordance with these instructions.

This product needs to be installed in accordance with, and meet the requirements of the Water Supply (Water Fittings) Regulations 1999 and current by-laws. For full Installation Requirements & Notes (IRN) please visit [wras.co.uk/directory](http://wras.co.uk/directory).

Isolation valves must be fitted to the inlet water supplies to ensure ease of future maintenance.

Before installing this product the water supply must be thoroughly flushed in order to remove any swarf, solder etc.

This product must not be modified in any way as this will invalidate the guarantee.

Full access must be made available for future maintenance/servicing purposes.

Before drilling into walls, check that there are no hidden electrical wires, cables or water supply pipes. This can be checked with the aid of an electronic detector.


If power tools are used do not forget to:

- Wear eye protection
- Unplug equipment after use


If in doubt, contact a registered plumber or your Local Water Authority or the Secretary of the Institute of Plumbing, address as follows:-

The Institute of Plumbing,  
64 Station Lane,  
Hornchurch,  
Essex,  
RM12 6NB, Tel: 01708 472791

### Pack Contents

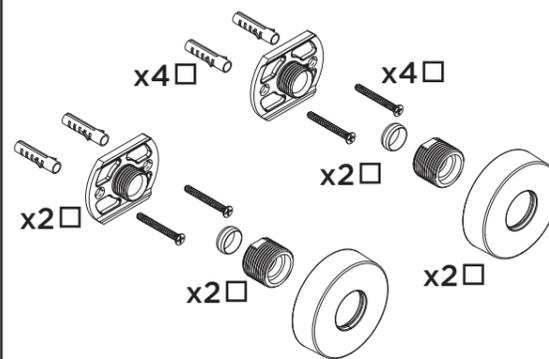


### Dimensions (mm)

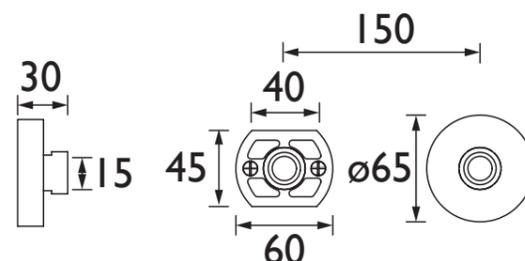


### Installation

1 **REMEMBER** hot on the left, cold on the right.

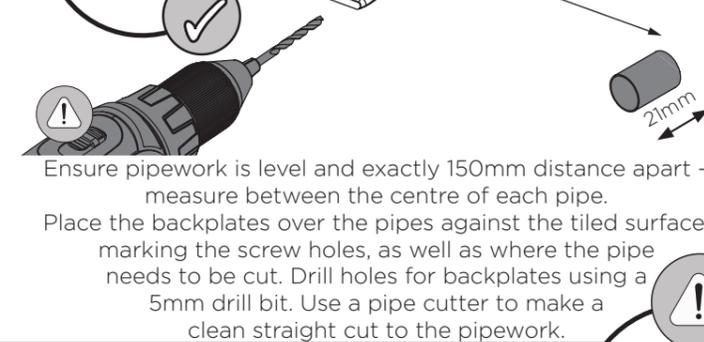


Ensure pipework is level and exactly 150mm distance apart - measure between the centre of each pipe. Place the backplates over the pipes against the tiled surface, marking the screw holes, as well as where the pipe needs to be cut. Drill holes for backplates using a 5mm drill bit. Use a pipe cutter to make a clean straight cut to the pipework.

2 **!** Ensure screws are not over tightened as this may crack the tiles!

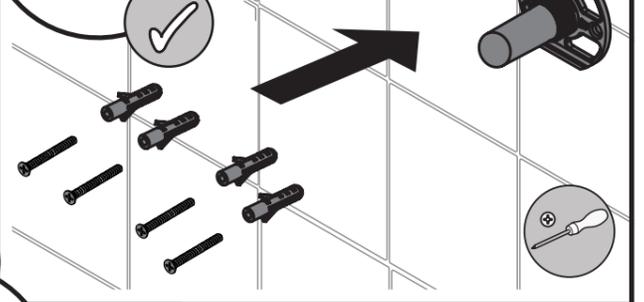

Apply a small amount of suitable sealant around the pipework where it protrudes through the tiles, before then securing backplates to the tiled surface using wall plugs and screws provided.


3

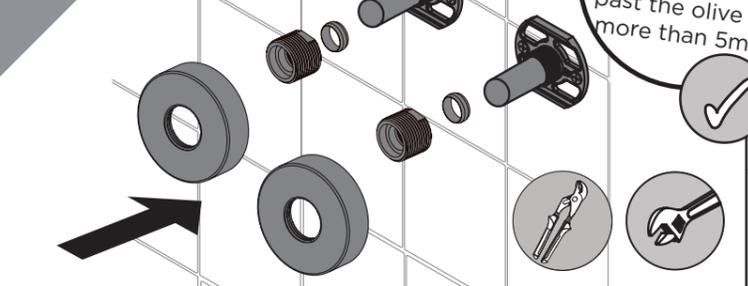

**IMPORTANT** Pipework must not protrude past the olive by more than 5mm

Slide olives onto pipes and then connect the threaded connectors to the backplates. Grip the back plate with pipe pliers whilst creating olive connection using adjustable spanner on the threaded connector - otherwise tiling can be cracked. Then, thread over the cover shrouds and screw back to the tiles.

4

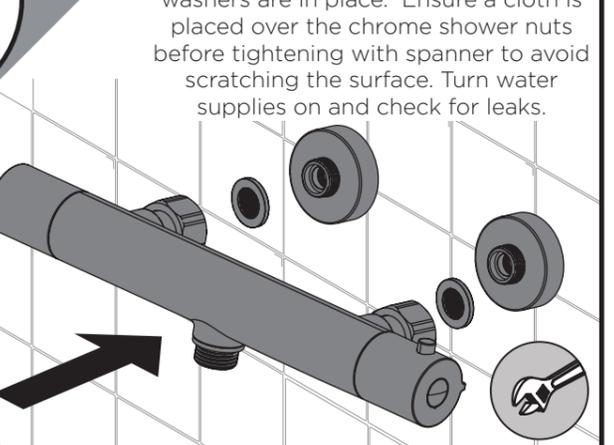

Attach the shower body to the wall mount connectors, ensuring filter washers are in place. Ensure a cloth is placed over the chrome shower nuts before tightening with spanner to avoid scratching the surface. Turn water supplies on and check for leaks.

### General Cleaning

Bristan products are made from premium materials, with hand polishing and electroplated finishes.

Your taps or shower should be regularly cleaned with warm water, a mild pH-neutral liquid soap, and polished with a soft cloth. Any residues from soap, toothpaste, shampoos and shower gels can cause blemishes if not rinsed off straight after use.

Household bleaches and cleaners contain harsh chemicals and may damage the surface finish. Avoid using abrasive cloths, scouring pads, scrub sponges, steel wool or anything similar.

Some surfaces such as nickel and pewter may be affected by the dye found in some cloths, so it is also important to avoid hanging cloths on spouts.

### Notes

At Bristan, we want to make things as easy as possible for our customers. That's why we offer solid guarantees on all our products, effective from the date of purchase, to give you peace of mind.

To start your free guarantee simply scan the QR code and register your product. Alternatively visit [www.bristan.com/register](http://www.bristan.com/register).

For any other queries, please call our Customer Service on 0330 026 6273 where our expert team of advisors will be able to offer you any help and advice.

For full guarantee terms and conditions visit [www.bristan.com/guarantees](http://www.bristan.com/guarantees).



*We Know & We Care*