

Commissioning

- Fit the other ceiling cover to the ceiling so both ends of the product are supported.
- Ensure the weight of the product is supported on the steel cables and not the electrical flex.
- Replace fuse or circuit breaker and switch on. Your light is now ready for use.

Fitting/replacing bulbs

- The LED module in this fitting are non-replaceable.

We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

Live Voltages may be present in this unit even when turned off or when completely disconnected. For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Instruction leaflet

Borde Pendant

59995, 59996, 67665, 67666



CE

saxby
lighting

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

If replacing an existing fitting, make a careful note of the connections.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP20.

This light fitting contains non-replaceable parts and cannot be serviced.

If damage occurs the part should be discarded.

This product is not dimmable.

The installation of this fitting will be much easier with the help of an assistant.

Specification

Voltage:	240V 50Hz a.c.	
Lamp:	59995/67665:	26W LED module (1800 lumens)
	55596/67666:	2 x 26W LED module (3600 lumens)
IP rating:	20	

Layout

- Ensure the ceiling is capable of holding the weight of the product

Installation

Existing fittings must be completely removed before installation of a new product. **Before removing the existing fitting, carefully note the position of each set of wires.**

- This product has two ceiling covers. Remove both fixing straps and attach them to the ceiling with the fixings provided. Check and measure the distance for the fixing straps/holes so the fixing cables hang vertically. Optimum distance between suspension cables is 800mm (345mm from each end) to allow power cable to be routed along suspension cable. Ensure the ceiling is capable of holding the weight of the product. Take care to avoid damaging any wiring or pipes.
- Decide the height at which the product will hang. There is a button in the middle of both ceiling covers (Fig. 1). Push the button (A) to reduce the height (if required). Make sure both fixing cables are adjusted to the same length to ensure the product hangs level.

- Fit the suspension cables to the product. Simply screw the rods at the end of the suspension cables into the holes into the module pendant (Fig. 2). Fit one ceiling cover to the ceiling so one end is supported. Support the other end to enable wiring connections to be made.
- Connect the supply cable to the quick fit terminal block as below




Fig. 1


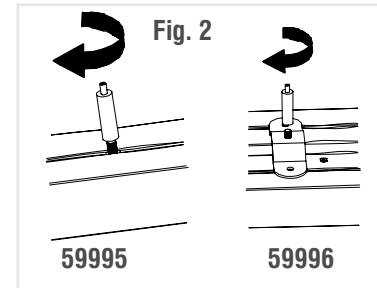


Fig. 2

Wiring

Having correctly identified the wiring from your existing light fitting, connect to the connection block inside the

product in the following way:

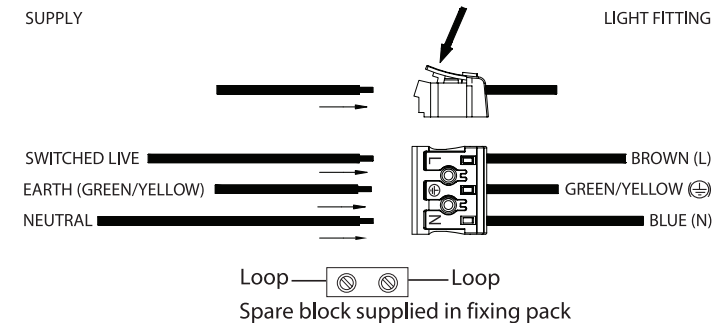

Check that...

- You have correctly identified the wires
- The connections are tight
- No loose strands have been left out of the connection block.