## AR2 THBF C

## ARTISAN Tap Range Artisan Thermostatic Bath Filler Chrome



Thermostatic control for bath

Pre-set maximum temperature at 38°c can be overidden by

Minimum working pressure of

Can be wall mounted using

**Product Certifications:** 

WRAS Cert. NUmber: 1912903

WRAS Expiry Date: 31/12/2024

47.5 L/Min

temperature are controlled

Dual control - flow and

Features:

separately

the user


0.5 bar


WMNT10 C

APPROVED PRODUCT

## Specification Product Type: Bathroom Taps Main Construction Material: Brass Mount Type: Deck Mounted Handle Type: **Round Handles** 1/2" **Connection Inlet: Connection Outlet:** G3/4" Number of Tap Holes: 1 Valve/Cartridge Type: 1/4 Turn 1/2" Ceramic Disc Valve **Plumbing System Requirements:** Suitable for balanced systems Minimum Dynamic Pressure: 0.5 Bar Maximum Dynamic Pressure: 5.0 Bar Maximum Hot Water Temperature: °C 80 Maximum Static Pressure: (bar) 10 Flow Type: **Dual Flow Isolation Included:** No

## Dimensions (measurements in mm)

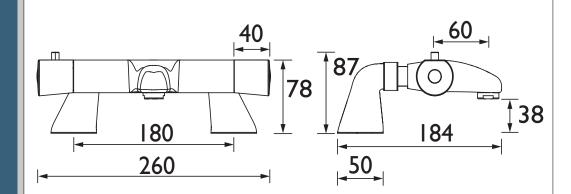

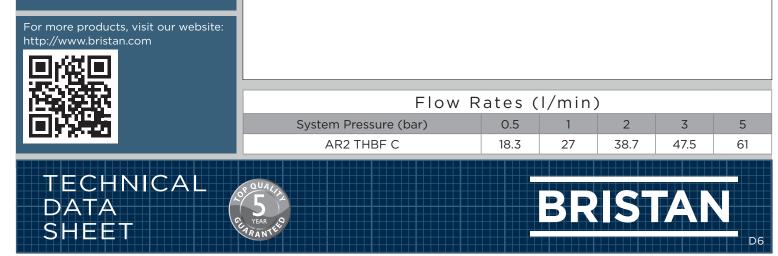

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.