

Product Finish: Brushed Nickel & Beech

Product code: AT2196-F5
EAN13 barcode: 5060879991149



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

Metal construction throughout with beech detailing

Crystal clear filtered water, easy to change, high quality carbon & resin scale control filter

Supplied complete with flexible tail pipes for fast simple fitting


Cold start handle positioning

filtered water through a dedicated spout pathway

Additional information / Parts included:

Includes Aquifer (high resin) safelock filter installation pack

Product dimensions:

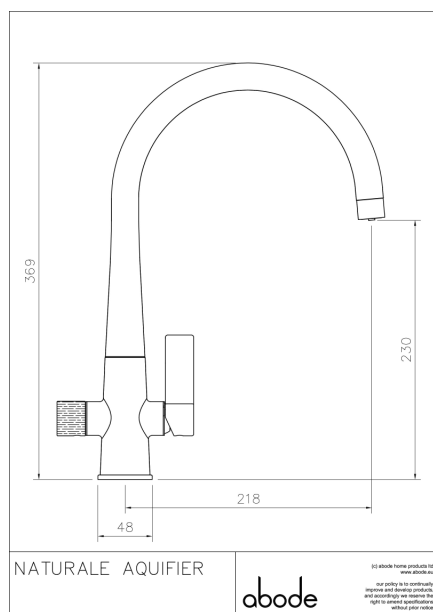

• Overall Height / projection: 369 mm

• Exit reach: 218 mm

• Exit height: 230 mm

• Centre distance(s):

• Base diameter(s): 48 mm

• Recommended hole diameter: Ø 35 mm

• Max. surface depth: 70 mm

• Spout diameter: 24 mm

• Spout aerator size: M22x1 M

Packaged properties:

Box length: 435mm

Box depth: 70mm


Box width: 340mm

Units per outer: 5

Tap only weight: TBCKg

Boxed weight: TBCKg

Product flow characteristics:

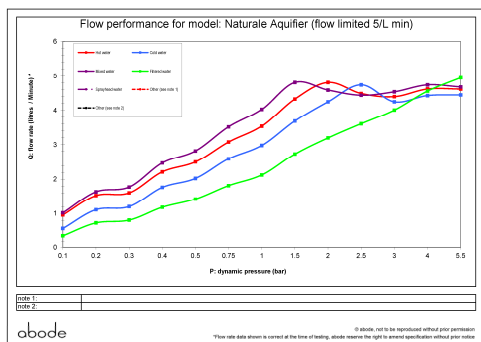

• Min / Max water pressure: 1.25 / 5.5 bar

• Recommended / Max water temperature: 46°C / 70°C

• Part G - Mixed flow rate at 3 bar (litres / min): 04.54

• Control valve type: Single lever ceramic cartridge, ceramic disc QT

• Product flow characteristics: (C&H / F) dual flow

• Non return valve(s): Integral to cold hose inlet only

• Aerator type: Honeycomb dual flow (limited 5L/M)

• Accepts revolve / spray areator: No

• Spout connection method: Grub screw

• Tail pipe inlet / outlet size: M8 / 1/2" Male (Hot), 1/2" Female (Cold)

• Inlet pipe type / length: flexible stainless braided hose / 360 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year