## COB BSM C

# COBALT Tap Range Cobalt Bath Shower Mixer Chrome



#### Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.5m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.3 bar

## **Product Certifications:**



WRAS Cert. Number: 2107078 WRAS Expiry Date: 31/07/2026




For more products, visit our website:



SHE

| Specification                     |                                   |  |  |  |
|-----------------------------------|-----------------------------------|--|--|--|
| Product Type:                     | Bathroom Tap                      |  |  |  |
| Main Construction Material:       | Brass                             |  |  |  |
| Mount Type:                       | Deck Mounted                      |  |  |  |
| Handle Type:                      | Lever Handles                     |  |  |  |
| Connection Inlet:                 | 3/4"BSP                           |  |  |  |
| Connection Outlet:                | Anti-Splash                       |  |  |  |
| Number of Tap Holes:              | 2                                 |  |  |  |
| Valve/Cartridge Type:             | 1/4 Turn 3/4" Ceramic Disc Valve  |  |  |  |
| Plumbing System Requirements:     | Suitable for all plumbing systems |  |  |  |
| Minimum Dynamic Pressure (bar):   | 0.3 bar                           |  |  |  |
| Maximum Dynamic Pressure (bar):   | 5.0 bar                           |  |  |  |
| Maximum Hot Water Temperature °C: | 65°C                              |  |  |  |
| Maximum Static Pressure (bar):    | 10 bar                            |  |  |  |
| Flow Type:                        | Single Flow                       |  |  |  |
| Isolation Included:               | No                                |  |  |  |

### Dimensions (measurements in mm)

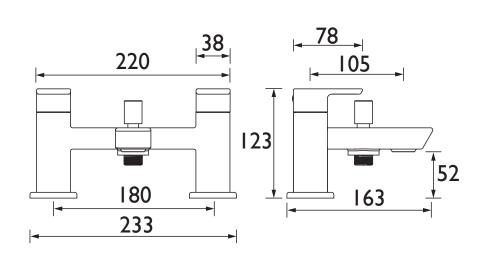

D8

| http://www.bristan.com |  |      |      |      |      |      |      |  |  |
|------------------------|--|------|------|------|------|------|------|--|--|
|                        | Flow Rates (I/min)                               |      |      |      |      |      |      |  |  |
| 化物效和                   | System Pressure (bar)                            | 0.3  | 0.5  | 1    | 2    | 3    | 5    |  |  |
|                        | Through Bath Filler (mixed)                      | 25.8 | 40.8 | 57.7 | 81.6 | 99.9 | 129  |  |  |
|                        | Through Handset (mixed)                          | 4.3  | 6.8  | 9.6  | 13.6 | 16.7 | 21.6 |  |  |
| TECHNICAL<br>DATA      | DE QUALITA<br>S<br>VEARS D<br>VEARS D<br>VEARS D |      | B    | RIS  | ST/  | NN   |      |  |  |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

RANT

RANT

\* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.