

EV KIT-EEFB C

SHOWER ACC Shower Range Single Function Extended Slide Bar Shower Kit Chrome



Features:

- Extended 910mm slide rail
- Extended 1.75m hose
- Single function, rub-clean, anti-limescale handset
- Push button slider mechanism
- Soap tray with integral closed loop hose retainer

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Stainless Steel; PVC; ABS
Shower Kit:	Adjustable Riser Kit
Shower Head Type:	Single Function Handset
Rub Clean Handset:	Yes
Mounting Type:	Wall
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	65
Connection Inlet:	G 1/2"
Connection Outlet:	G 1/2"
Isolation Included:	No
Check Valve Included:	No
What's Included:	1x Riser Rail, 1x Plated Shelf, 1x Handset, 1x 1.75m Hose, 1x Green Limiter, 4x Screws, 4x Rawl Plugs, 1x Allen Key, 1x Fitting Instructions

Dimensions (measurements in mm)

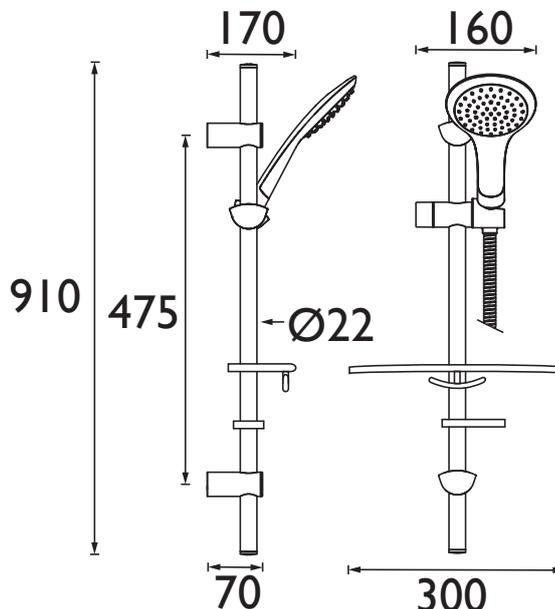

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.5	7.1	10	14.2	17.4	22.5

TECHNICAL DATA SHEET



BRISTAN

D8

EV KIT-EEFB C H

SHOWER ACC Shower Range Heatcare Single Function 1250mm Shower Kit Chrome



Features:

- Extended 910mm slide rail
- Extended 1.25m hose
- Single function, rub-clean, anti-limescale handset
- Push button slider mechanism
- Soap tray with integral closed loop hose retainer

Product Certifications:



WRAS Certificate No: 1801061
WRAS Expiry Date: 31/01/2023




For more products, visit our website:
<http://www.bristan.com>



Specification

Finish/Colour:	Chrome Plated
Main Construction Material:	Stainless Steel; PVC; ABS
Shower Kit:	Adjustable Riser Kit
Shower Head Type:	Single Function Handset
Rub Clean Handset:	Yes
Mounting Type:	Wall
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.2 bar
Maximum Dynamic Pressure (bar):	5 bar
Maximum Static Pressure (bar):	10 bar
Maximum Hot Water Supply Temperature °C:	65
Connection Inlet:	G 1/2"
Connection Outlet:	G 1/2"
Isolation Included:	No
Check Valve Included:	No
What's Included:	1x Riser Rail and End Brackets, 1x Shelf, 1x Handset, 1x 1.25m Hose, 1x Green Limiter, 4x Screws, 4x Rawl Plugs, 1x Allen Key, 1x Fitting Instructions

Dimensions (measurements in mm)

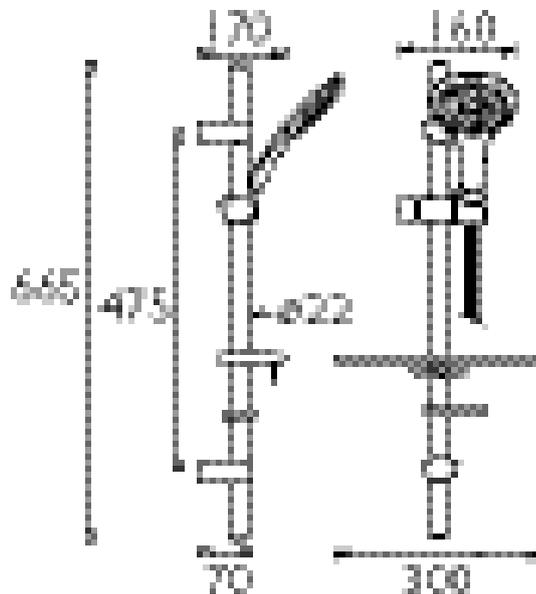

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	4.5	7.1	10	14.2	17.4	22.5

TECHNICAL DATA SHEET



BRISTAN

D2