FZ SHXMMCTFF C

FRENZY Shower Range FRENZY Safe Touch Bar Mixer with Fast Fit **Connections and Multi Mode Kit**



Features:

- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar showers, using built in front-of-wall isolation
- Unique Safe Touch technology ensures the valves stays cool to the touch while in use
- Dual control flow and temperature are controlled separately
- 15mm inlet connections.

Product Certifications:




For more products, visit our website: www.bristan.com



Specification				
Product Type:	Thermostatic Bar Shower			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Bar Shower			
Shower Head Type:	Adjustable			
Flow Control Valve Type:	Thermostatic Cartridge			
Maximum Hot Water Supply Temperature °C:	60			
Maximum Static Pressure: (bar)	10			
Plumbing System:	All, Preferably Balanced			
Min Dynamic Pressure:	0.2 Bar			
Max Dynamic Pressure:	5.0 Bar			
Connection Inlet:	15mm Compression			
Connection Outlet:	G 1/2"			
Isolation Valve Included:	Yes			
Check Valve Included:	Yes			

Dimensions (measurements in mm)

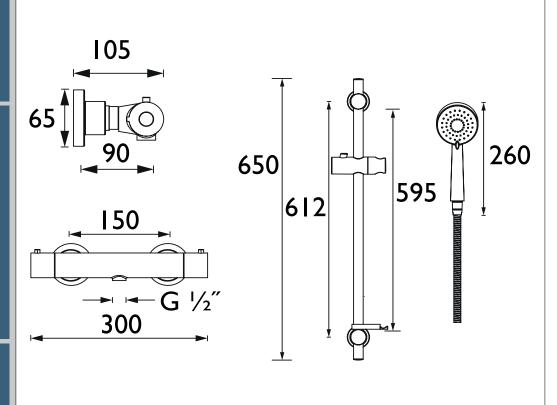

Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	1	2	3	5	
FZ SHXMMCTFF C (Handset)	2.4	4.3	6.4	9.3	11.7	15.3	

TECHNICAL

