COB BSM C

COBALT Tap Range Cobalt Bath Shower Mixer Chrome



			res	
_	\sim \sim	TII	$r \cap c$	
	Ca	uч		٠.

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.5m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.3 bar

Product Certifications:






For more products, visit our website: http://www.bristan.com



Specification					
Product Type:	Bathroom Tap				
Main Construction Material:	Brass				
Mount Type:	Deck Mounted				
Handle Type:	Lever Handles				
Connection Inlet:	3/4"BSP				
Connection Outlet:	Anti-Splash				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5.0 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single Flow				
Isolation Included:	No				

Dimensions (measurements in mm)

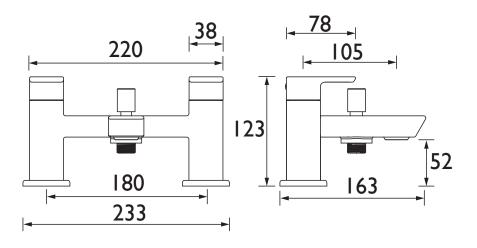

Flow Rates (I/min)									
System Pressure (bar)	0.3	0.5	1	2	3	5			
Through Bath Filler (mixed)	25.8	40.8	57.7	81.6	99.9	129			
Through Handset (mixed)	4.3	6.8	9.6	13.6	16.7	21.6			

TECHNICAL DATA SHEET



