GLIDE Tap Range Glide Waterfall Bath Filler Chrome

GWF BF C



Long life and easy to use 1/4 turn ceramic disc valves Metal back nuts for added

Includes 1.5m hose, rub-clean anti-limescale handset and wall

Product Certifications:

WRAS Certificate No: 1911912

WRAS Expiry Date: 30/11/2024

Features:


durability

bracket

WRAS

Specification	
Product Type:	Bathroom Tap
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Lever
Connection Inlet:	3/4" BSP Male Connector
Connection Outlet:	Stainless Steel Integral Aerator
Number of Tap Holes:	2
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn
Plumbing System Requirements:	Suitable for all plumbing systems
Minimum Dynamic Pressure (bar):	0.1 bar
Maximum Dynamic Pressure (bar):	5.0 bar
Maximum Hot Water Temperature °C:	65°C
Maximum Static Pressure (bar):	10 bar
Flow Type:	Single
Isolation Included:	No

Dimensions (measurements in mm)

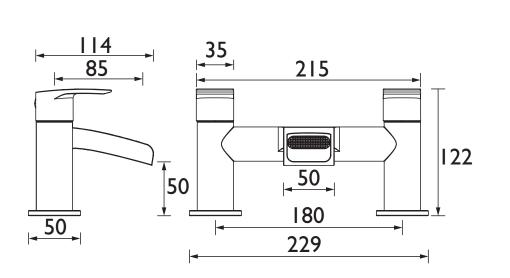

Flow Rates (I/min)

0.1

14.9

0.5

39.6

1

56.7

2

80.1

3

98.2

5

126.8

D3

For more products, visit our website: http://www.bristan.com

TECHNICAL



DATA

S

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

System Pressure (bar)

GWF BF C (mixed)