SPECIFICATION SHEET

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BRN



DESCRIPTION:

concealed 1 outlet shower valve
single lever
wall mounted
with rectangular backplate
ceramic cartridge CAR-K35A
2 x 1/2" female inlets
2 x 1/2" female outlets (one is blanked off)
min-max wall mount 40-65mm
minimum operating pressure 0.5 bar LP (shower) / 1.5
bar MP (bath)

FINISH:


Brushed Nickel

MINIMUM OPERATING PRESSURE:

0.2 bar LP (shower) 1.5 bar MP (bath)

FLOW RATE AT 3.0 BAR FLOW PRESSURE:


23 L/min





tel: 01934 744466 email: sales@vado.com www.vado.com








TECHNICAL DRAWING

COLLECTION: EDIT

PRODUCT CODE: IND-EDI145A-BRN

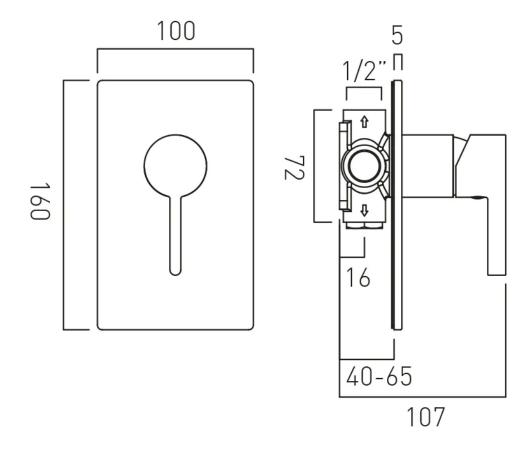

tel: 01934 744466 email: sales@vado.com www.vado.com

