# SPECIFICATION SHEET

**COLLECTION:** ELEMENTS **PRODUCT CODE:** IND-ELE148D/2-BLK



#### **DESCRIPTION:**


DX Elements concealed 2 outlet, 2 handle thermostatic shower valve with integrated diverter wall mounted with circular backplate thermostatic cartridge V-001C-PLA diverter cartridge FL-804-33X/3X 2 x 3/4" female inlets 2 x 3/4" female outlets includes 3/4" - 1/2" adaptors inc. bleed valve for system flush on installation min-max wall mount 70-95mm optimum installation depth 82mm minimum operating pressure 0.2 bar LP (shower) minimum operating pressure 1.0 bar MP (bath)

#### FINISH: Brushed Black

MINIMUM OPERATING PRESSURE:

0.2 bar LP (shower) 1.0 bar MP (bath)







tel: 01934 744466 email: sales@vado.com www.vado.com


### where inspiration flows



taps | showering | accessories

## TECHNICAL DRAWING

**COLLECTION:** ELEMENTS **PRODUCT CODE:** IND-ELE148D/2-BLK

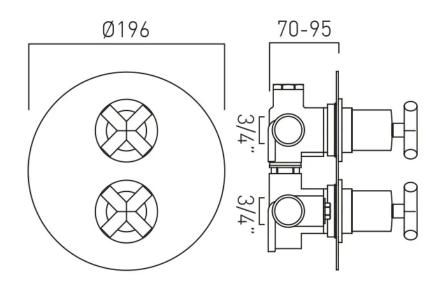

tel: 01934 744466 email: sales@vado.com www.vado.com

### where inspiration flows



taps | showering | accessories