

IRBS2-CP

COMMERCIAL Tap Range Infra Red Automatic Basin Spout



Features:

- Using non-touch controls they are operated with infrared technology.
- Bristan's automatic basin taps are great in supporting infection control measures
- Mains or battery powered options.
- Automatic switch off supports water saving.
- A hard-wearing, flawless chrome finish that lasts for years. Scratch resistant and salt spray tested to ensure added durability.
- Can be used in a BREEAM assessed building.
- IRBS2-CP not suitable for fitting to metallic sinks or troughs.
- This tap outputs a fixed water temperature and should only be installed in conjunction with an approved thermostatic mixing valve to meet Part-G of the building regulations.

Product Certifications:

WRAS Cert. Number: 2003383
WRAS Expiry Date: 31/03/2025





For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Commercial
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Connection Inlet:	G 1/2" BSP
Connection Outlet:	5.7lpm Aerator
Number of Tap Holes:	1
Valve/Cartridge Type:	Thermostatic
Plumbing System Requirements:	Suitable for High Pressure Systems
Working Pressure Range:	Min. 1.0 Bar, Max. 5.0 Bar
Maximum Hot Water Temperature: °C	65
Maximum Static Pressure: (bar)	10
Isolation Included:	No

Dimensions (measurements in mm)

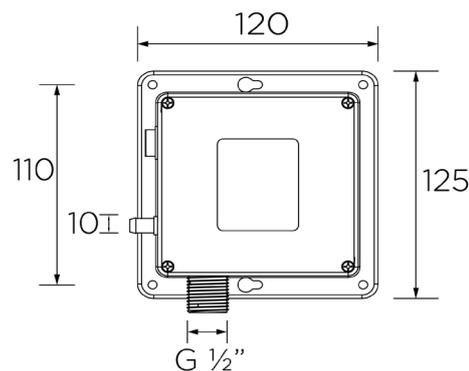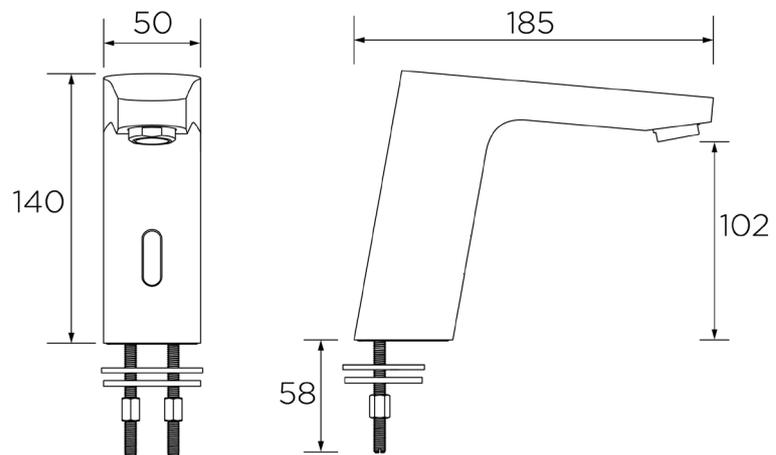

Flow Rates (l/min)

System Pressure (bar)	1	2	3	5
IRBS2-CP	5.0	5.0	5.0	5.0

TECHNICAL
DATA
SHEET



BRISTAN

D6