MH SNK EF C

MANHATTAN Tap Range Manhattan Easyfit Mono Sink Mixer Chrome



| F | | | | | | | | |
|---|--------|---------------|----|---|------------------|----------|---------------------|---|
| _ | \sim | $\overline{}$ | T. | | \boldsymbol{r} | $\hat{}$ | $\boldsymbol{\sim}$ | ч |
| | ᆫ | а | u | u | | C | 5 | |
| | _ | - | ы | _ | | _ | _ | |

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal fixing nut for added durability
- Easyfit base included
- · Flexible tails included

| Specification | | | | | | |
|-----------------------------------|-----------------------------------|--|--|--|--|--|
| Product Type: | Kitchen Taps | | | | | |
| Main Construction Material: | Brass | | | | | |
| Mount Type: | Deck Mounted | | | | | |
| Handle Type: | Lever Handles | | | | | |
| Connection Inlet: | 1/2" BSP Flexible Tails | | | | | |
| Connection Outlet: | M24 Flow Straightener | | | | | |
| Number of Tap Holes: | 1 | | | | | |
| Valve/Cartridge Type: | 1/2" Ceramic Disc Valve | | | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | | | |
| Minimum Dynamic Pressure (bar): | 0.3 bar | | | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | | | |
| Maximum Hot Water Temperature °C: | 60°C | | | | | |
| Maximum Static Pressure (bar): | 10 bar | | | | | |
| Flow Type: | Single Flow | | | | | |
| Isolation Included: | Yes | | | | | |


Product Certifications:



For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

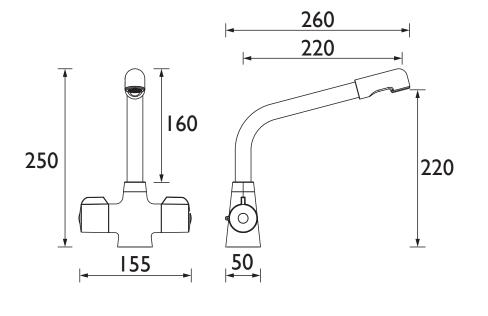

| Flow Rates (I/min) | | | | | | | | | | |
|-----------------------|------|------|------|------|------|------|--|--|--|--|
| System Pressure (bar) | 0.3 | 0.5 | 1 | 2 | 3 | 5 | | | | |
| MH SNK EF C (mixed) | 10.6 | 13.7 | 18.8 | 27.2 | 33.6 | 43.4 | | | | |

TECHNICAL DATA SHEET



