

PM2 SQSHXAR C

PRISM Shower Range Prism Exposed Sequential Shower Valve with Adjustable Riser Kit Chrome



Features:

- 15mm inlet connections
- Easy replacement with adjustable inlets so you can use on existing pipework centres between 136mm and 158mm
- Thermostatic cartridge with preset temperature stop at 42°C
- Supplied with 2 x 8L/min flow regulators
- Includes riser rail with adjustable fixing bracket, rub-clean anti-limescale handset and hose

Product Certifications:



WRAS Certificate No: 1802002
WRAS Expiry Date: 28/02/2023


For more products, visit our website:
<http://www.bristan.com>



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Exposed
Shower Head Type:	Multi-Function Handset
Valve/Cartridge Type:	Sequential Cartridge
Maximum Hot Water Supply Temperature	65
Dynamic Pressure Range: (bar)	5
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All
Working Pressure Range:	Min 0.1 Bar, Max 5.0 Bar
Flow Rate: (l/min @ 3 bar)	13.4
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

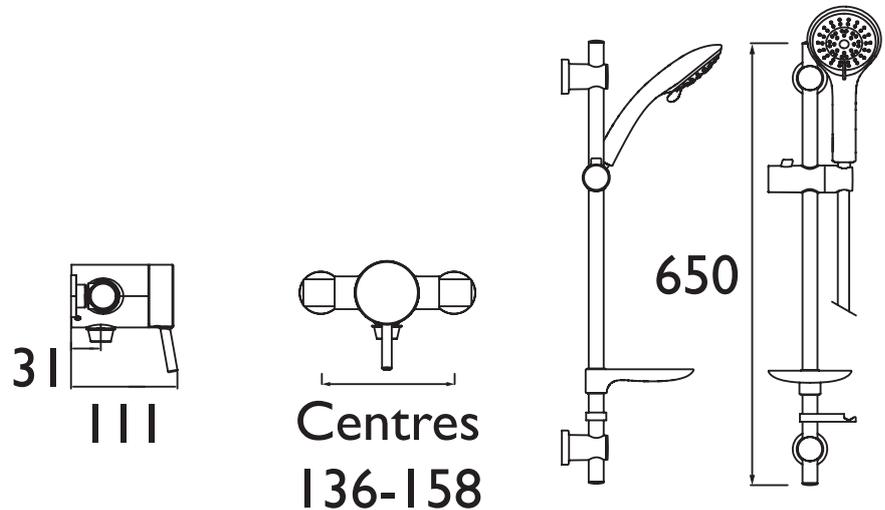

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
With Flow Regulators		6.5	9.7	13.7	13.4	12.3
Without Flow Regulators	4.1	6.5	9.8	14.2	17.6	23

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D2