

PM2 SQSHXVO C

PRISM Shower Range Prism Exposed Sequential Chrome Shower Valve



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Sequential
Temperature Control:	Thermostatic
Shower Head Type:	
Maximum Temperature Setting: °C	42
Maximum Hot Water Temperature: °C	65
Dynamic Pressure Range: (bar)	Min 0.2 Bar, Max 5.0 Bar
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Suitable for all plumbing conditions
Flow Rate (l/min @ 3 bar)	12.3
Flow Regulator:	Yes
Connection Inlet:	15mm Compression
Connection Outlet:	15mm Compression
Isolation Valve Included:	No
Check Valve Included:	Yes

Features:

- Bottom outlet
- Adjustable inlet centres mean you can use existing pipework with centres between 136mm and 158mm
- Supplied with 8l/m flow limiters
- Chrome plated to BS EN 248
- Matching taps available

Product Certifications:



WRAS Certificate No: 1702038



For more products, please visit our website:



Dimensions (measurements in mm)

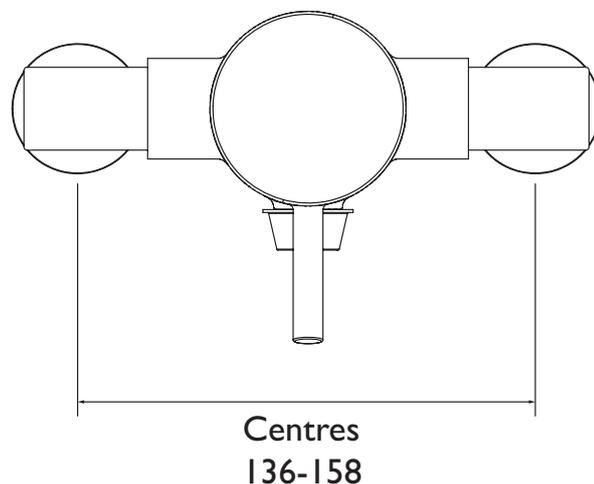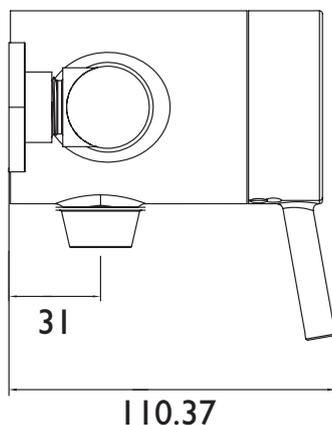

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
With Flow Regulators		12.7	13.4	14.5	14.8	12.9
Without Flow Regulators	10.3	18.6	27.3	39.1	48	61.7

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D3