



Profile 21 Close Coupled WC Pan

Illustrated

- S3092** Profile 21 WC pan close coupled with horizontal outlet
- S3094** Profile 21 close coupled cistern 4/2.6 Litre dual flush push button valve, bottom supply and internal overflow
- S4103** Profile 21 seat and cover

Configuration options

- S3093** Profile 21 close coupled cistern, 6/4 Litre dual flush push button valve bottom supply and internal overflow
- S4102** Profile 21 seat and cover, slow close
- S4305** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to P trap
- S4300** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to S or turned P trap

Material

Vitreous China

Standards

Vitreous china to BS 3402

Weights


- S3092 17.5KG
- S3094 17.71KG
- S4103 2.3KG

Special Notes

WC screwed to floor & cistern screwed to wall.

Colours

White (01)

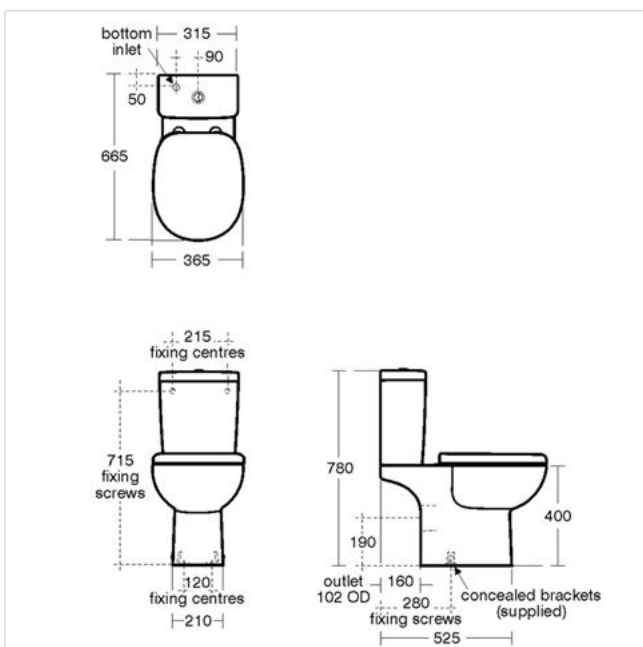

Frequently used applications

- | | |
|--------------------|--------------------|
| Education | Factory |
| General Healthcare | Hotels |
| Office | Public Building |
| Pubs and Clubs | Residential |
| Retail | Sports and Leisure |

Features

Water Saving

Accreditations

WEPLS
WTL

*Armitage
Shanks*

Tel: 0870 122 8822
Fax: 0870 122 8282
Email: info@idealspec.co.uk
Web: www.idealspec.co.uk

Ideal Standard (UK) Ltd. makes every effort to ensure that the information provided on its website is accurate. However, we cannot guarantee this, and accept no liability for any information or advice given via its website.

Powered by
Ideal Spec

Date created: 25/02/2013