



## Conceala 2 Cistern Universal Height 4.5 Litre Valve Side Supply

### Illustrated

- S3640** Conceala 2 cistern 4.5 Litre single flush valve side supply and internal overflow, alternative height plastic flushbends
- S4512** Finger push button pneumatic, Stainless Steel for 31mm maximum thickness partition

### Configuration options

- S4489** Finger push button pneumatic, Stainless Steel body for 400mm maximum wall thickness
- S4463** Palm push button Pneumatic, plastic for 31mm maximum thickness partition
- SV316** 3 metre tube

### Material

Plastic

### Standards

Cistern to BS EN 14055

### Weights


- S3640 2.66KG
- S4512 0.621KG

### Special Notes

Valve operated cisterns are supplied with an 800mm length of plastic air tube. An optional 3m length can be purchased where remote operation is required. Syphon operated cisterns with lever supplied are suitable for 150mm max wall thickness. Longer levers can be purchased for thicker walls.

### Colours

Neutral / No Finish (67)

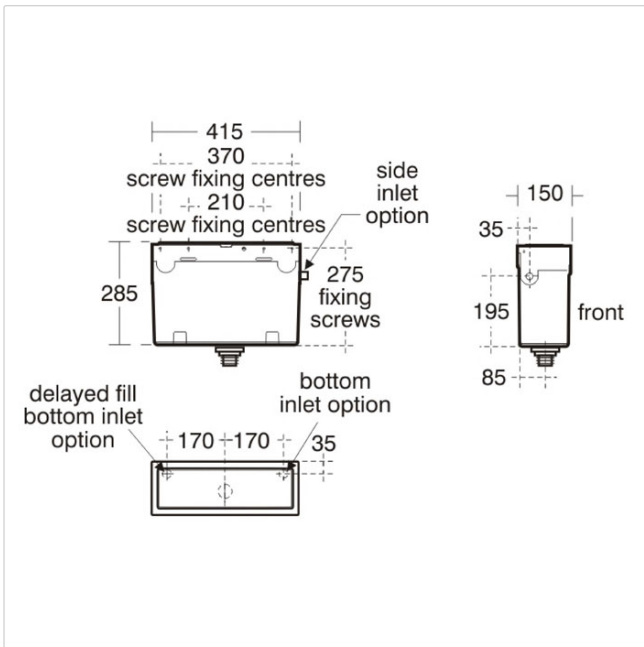

### Frequently used applications

- |                    |                    |
|--------------------|--------------------|
| Education          | Factory            |
| General Healthcare | Hotels             |
| Office             | Public Building    |
| Pubs and Clubs     | Residential        |
| Retail             | Sports and Leisure |

### Features

Water Saving

### Accreditations

WEPLS  
WTL