QUEST Tap Range Quest Bath Shower Mixer Chrome

D11


QST BSM C



Features:


- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Easy to use metal handles
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.3 bar

Product Certifications:

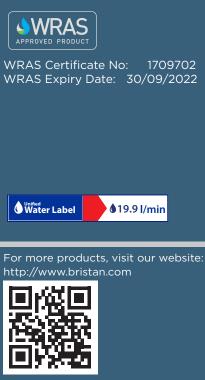

Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Triangular			
Connection Inlet:	3/4" BSP			
Connection Outlet:	G 1/2"			
Number of Tap Holes:	2			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Dimensions (measurements in mm)

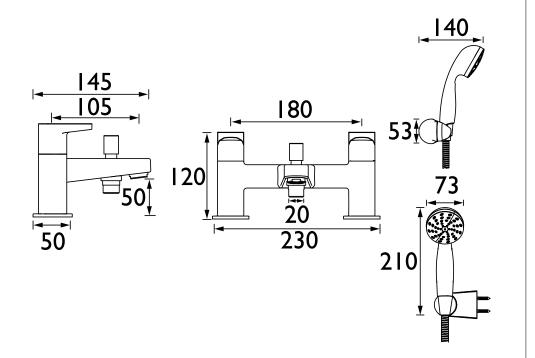

	Flow Rates (I/min)							
化输送器	System Pressure (bar)	0.3	0.5	1	2	3	5	
	Through Bath Filler (mixed)	19	24.6	34.8	49.2	60.2	77.7	
	Through Handset (mixed)	6.3	8.1	11.5	16.2	19.9	25.7	
TECHNICAL DATA SHEET	DR QUALINZ VEARS LO VEARS LO VEARS LO VEARS LO VEARS LO VEARS LO VEARS LO VEARS LO		B	RIS	3T/			

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.