

Product Finish: Chrome & Beech

Product code: AT2195-F5
EAN13 barcode: 5060879991132



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.

Product features:

Metal construction throughout with beech detailing

Crystal clear filtered water, easy to change, high quality carbon & resin scale control filter

Supplied complete with flexible tail pipes for fast simple fitting


Cold start handle positioning

filtered water through a dedicated spout pathway

Additional information / Parts included:

Includes Aquifer (high resin) safelock filter installation pack

Product dimensions:

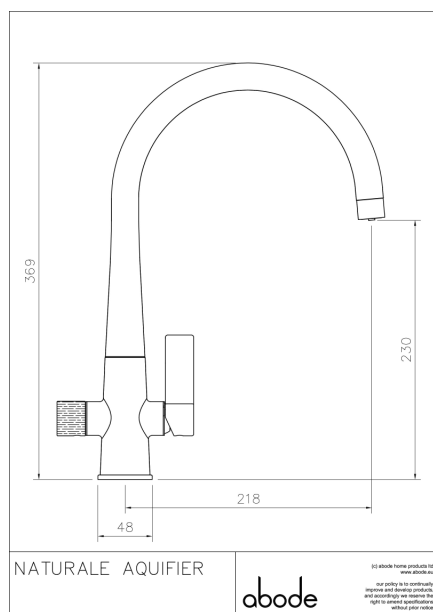

- **Overall Height / projection:** 369 mm
- **Exit reach:** 218 mm
- **Exit height:** 230 mm
- **Centre distance(s):**

- **Base diameter(s):** 48 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 70 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** M22x1 M

Packaged properties:

Box length: 435mm

Box depth: 70mm


Box width: 340mm

Units per outer: 5

Tap only weight: TBCKg

Boxed weight: TBCKg

Product flow characteristics:

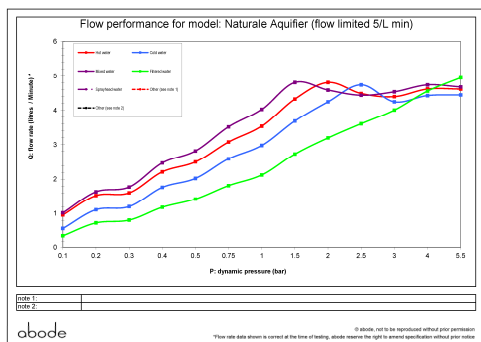

- **Min / Max water pressure:** 1.25 / 5.5 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 04.54

- **Control valve type:** Single lever ceramic cartridge, ceramic disc QT
- **Product flow characteristics:** (C&H / F) dual flow
- **Non return valve(s):** Integral to cold hose inlet only

- **Aerator type:** Honeycomb dual flow (limited 5L/M)
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M8 / 1/2" Male (Hot), 1/2" Female (Cold)
- **Inlet pipe type / length:** flexible stainless braided hose / 360 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year