APE BSM GM

APELO Tap Range Apelo Bath Shower Mixer Gun Metal Grey



| Specification | |
|-----------------------------------|------------------------------------|
| Product Type: | Bathroom Taps |
| Main Construction Material: | Brass |
| Mount Type: | Deck |
| Handle Type: | Long Angled |
| Connection Inlet: | 3/4" BSP |
| Connection Outlet: | Housed M24 Aerator |
| Number of Tap Holes: | 2 |
| Valve/Cartridge Type: | 3/4" Short Stem Ceramic Disc Valve |
| Plumbing System Requirements: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.3 bar |
| Maximum Dynamic Pressure (bar): | 5 bar |
| Maximum Hot Water Temperature °C: | 60°C |
| Maximum Static Pressure (bar): | 10 bar |
| Flow Type: | Single |
| Isolation Included: | No |

Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- Available in a Gun Metal Grey finish to add depth and contrast to your bathroom.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10-year parts and 1 year labour guarantee for peace of mind.
- Also available in chrome, black and brushed brass.
- Co-ordinating Bathroom taps and Accessories available.

Product Certifications:






Kiwa Certification No: 2312719 Kiwa Expiry Date: 11/12/2028

WRAS Certification No: 2312357 WRAS Expiry Date: 31/12/2028





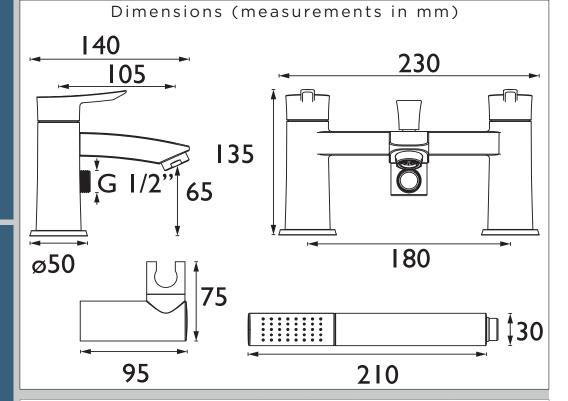

Flow Rates (I/min) System Pressure (bar) 0.3 0.5 2 Through Bath Filler (mixed) 12.5 16.4 33.3 40.8 52.6 24 Through Handset (mixed) 3.9 5.2 11.2 14.3 19 7.6

TECHNICAL DATA SHEET



