

APE ES SMBAS C

APELO Tap Range Apelo Eco start Small Basin Mixer with Clicker Waste Chrome



Features:

- Eco Start technology saves energy by having cold water as the default central start position of the tap handle. Hot water is only activated when the tap lever is moved from the central position, so your boiler is not unnecessarily switched on.
- Long life ceramic cartridge for added durability and ease of use
- Includes clicker waste
- A hard-wearing, flawless chrome finish that lasts for years. Scratch resistant and salt spray tested to ensure added durability
- Metal fixing nut for added durability

Product Certifications:




For more products, visit our website:
<http://www.bristan.com>



Specification

| | |
|--|--------------------------------------|
| Product Type: | Bathroom Taps |
| Main Construction Material: | Brass |
| Mount Type: | Deck |
| Handle Type: | Long Angled |
| Connection Inlet: | 1/2" BSP Flexible Tails |
| Connection Outlet: | Housed 5lpm M24 Aerator |
| Number of Tap Holes: | 1 |
| Valve/Cartridge Type: | 35mm Cold Start Upper Seal Cartridge |
| Plumbing System Requirements: | Suitable for all plumbing systems |
| Minimum Dynamic Pressure (bar): | 0.5 bar |
| Maximum Dynamic Pressure (bar): | 5 bar |
| Maximum Hot Water Temperature °C: | 60°C |
| Maximum Static Pressure (bar): | 10 bar |
| Flow Type: | Single |
| Isolation Included: | No |

Dimensions (measurements in mm)

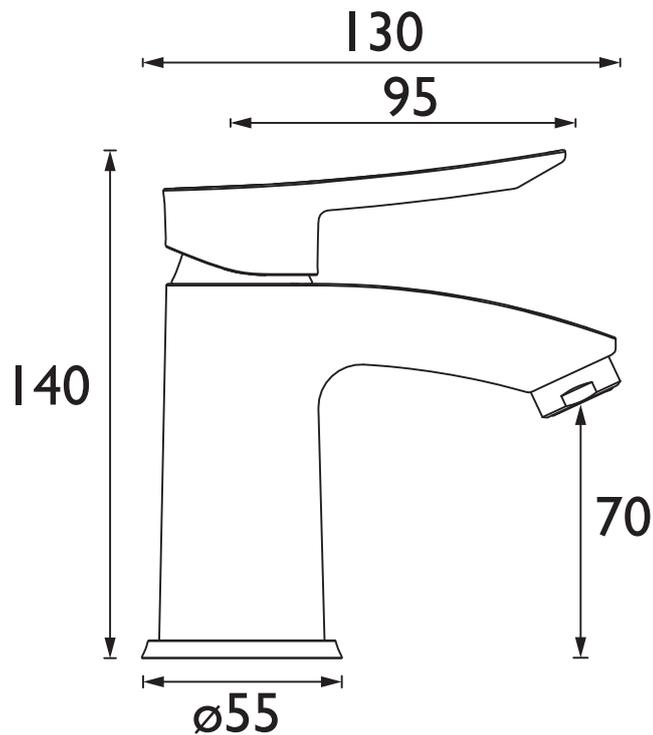

Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1 | 2 | 3 | 5 |
|------------------------|-----|-----|-----|-----|-----|
| APE ES SMBAS C (mixed) | 3 | 4.1 | 5.4 | 5.1 | 4.8 |

TECHNICAL DATA SHEET



BRISTAN

D1