DSC WMBAS C

DESCENT Tap Range Descent Wall Mounted Basin Mixer Chrome



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Wall Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	15mm Compression Threaded Tail			
Connection Outlet:	M24 Anti-Splash			
Number of Tap Holes:	3			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- 1/2" Valve
- Brass construction

Product Certifications:



WRAS Cert. Number: 2304904 WRAS Expiry Date: 30/04/2028




38.4 l/min

For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

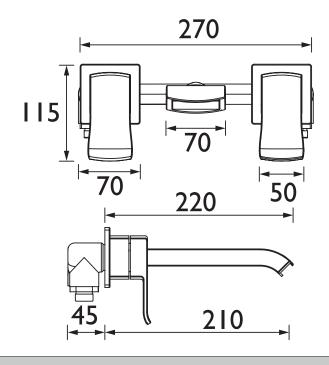

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
DSC WMBAS C (mixed)	9.9	15.7	22.2	31.4	38.4	49.6		

TECHNICAL DATA SHEET



