## DSC WMBF C

# DESCENT Tap Range Descent Wall Mounted Bath Filler Chrome



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Wall			
Handle Type:	Lever Handles			
Connection Inlet:	22mm Compression			
Connection Outlet:	Open			
Number of Tap Holes:	3			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.5 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

#### Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- 10 year parts and 1 year labour guarantee for peace of mind.
- Co-ordinating Bathroom taps, Recess shower and Accessories available.

#### **Product Certifications:**




WRAS Certificate No: 2304903 WRAS Expiry Date: 30/04/2028

For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

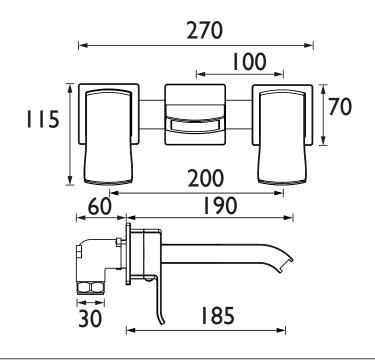

Flow Rates (I/min)							
System Pressure (bar)	0.5	1	2	3	5		
225909 (mixed)	22.4	32.5	45.2	55.4	71.4		

### TECHNICAL DATA SHEET



Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.

