DSC BSM C

DESCENT Tap Range Descent Bath Shower Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Minimum working pressure of 0.3 bar

Product Certifications:



WRAS Certificate No: 2307332 WRAS Expiry Date: 31/07/2028






For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	3/4" BSP threaded tail			
Connection Outlet:	Open			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	No			

Dimensions (measurements in mm)

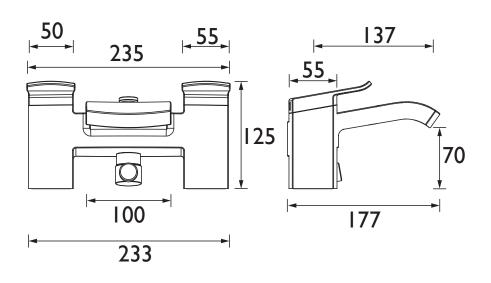

Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
Through Bath Filler (mixed)	20.5	26.5	37.4	52.9	64.8	83.7		
Through Handset (mixed)	10.4	13.4	18.9	26.8	32.8	42.3		

TECHNICAL DATA SHEET



