DUL SNK EF C

DU LEVER Tap Range Design Utility Lever Easyfit





Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal fixing nut for added durability
- Easyfit base included
- Flexible tails included

Specification				
Product Type:	Kitchen Taps			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handles			
Connection Inlet:	1/2" BSP Flexible Tails			
Connection Outlet:	Flow Straightener			
Number of Tap Holes:	1			
Valve/Cartridge Type:	1/2" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.4 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	Yes			

Product Certifications:



WRAS Certificate No: 2012902 WRAS Expiry Date: 31/12/2025






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

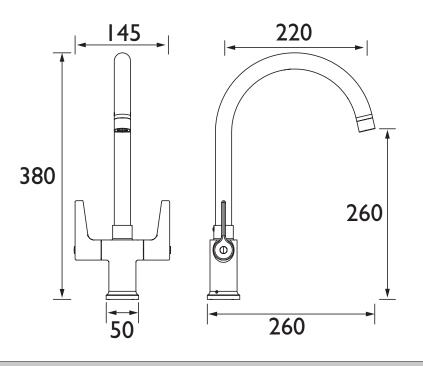

Flow Rates (I/min)								
System Pressure (bar)	0.4	0.5	1	2	3	5		
DUL SNK EF C (mixed)	13.3	14.9	21.1	29.8	36.5	47.1		

TECHNICAL



