TECHNICAL DATA SHEET


DESCENT Floor Standing Bath Shower Mixer

Product Specification

Product Code: Finish: Product Type: Construction:

Cartridge Type: Supply: Inlet: Working Pressures: DSC FSBSM C Chrome plated Contemporary Bodies are of all brass construction and is designed to conform to BS EN 200 40mm Cartridge Suitable for high pressure plumbing systems M12 15mm Compression Flexible Tails Min 1.5 Bar Max 5.0 Bar



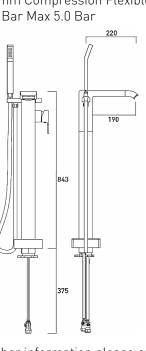



- •Chrome plated to BS EN 248.
- •Supplied with metal handle.

Technical Advice:

For further information please call 0844 7016273 or email customercare@bristan.com.

Guarantee:

5 years covering manufacturing faults.

Flow Rates (litres per minute)

| System Pressure | 2.0 bar | 3.0 bar | 4.0 bar | 5.0 bar |
|----------------------|---------|---------|---------|---------|
| DSC FSBSM C (mixed) | 24.2 | 28.6 | 28.6 | 31.5 |
| DSC FSBSM C (shower) | 12.1 | 13.1 | 15.5 | 17.4 |

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>



D1

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.